

# K2 POWER ES 165 K2

Woofer 6<sup>1</sup>/<sub>2</sub>"




- K2 Power sandwich cone
- "TMD" surround (patented technology)
- 2 Ω
- 1<sup>1</sup>/<sub>4</sub>" [32mm] VC diameter

## SPECIFICATIONS

Nominal power	100W	
Maximum power	200W	
Sensitivity (2,83V/1m)	92.8dB	
Cone	Kevlar sandwich	
Nom. impedance	2Ω	
Surround	Butyl	
DC resistance	1.8Ω	
VC diameter	32mm	1 <sup>1</sup> / <sub>4</sub> "
Former	Kapton	
Layers	2	
Wire	CCAW	
Magnet (d x h)	95x20mm	3 <sup>4</sup> / <sub>16</sub> "x0 <sup>25</sup> / <sub>32</sub> "
Net weight	1450g	3.20lbs


## FREQUENCY RESPONSE/IMPEDANCE

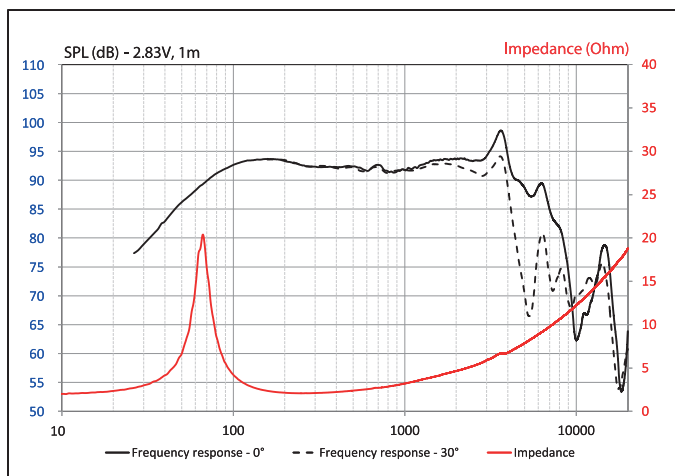

## PARAMETERS

Rdc	1.8 Ω
Fs	67Hz
Mms	13g
Cms	0.41mm/N
Vas	10l
Qts	0.55
Qes	0.6
Qms	7
Bxl	4.2 N/A
Sd	128.6cm <sup>2</sup>
SPL	89.8dB
Xmax	4.8mm

## MECHANICAL DRAWING

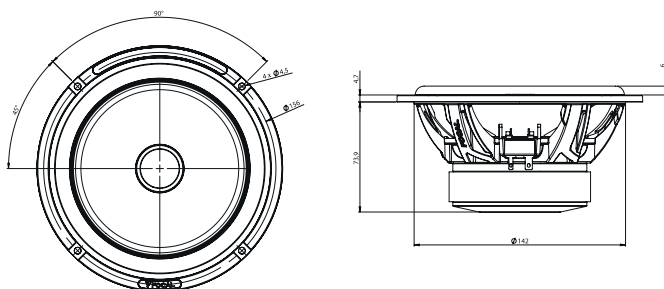

 **Elite**  
"HAUTE COUTURE" SOUND

 **FOCAL**<sup>®</sup>  
THE SPIRIT OF SOUND