

K2 POWER TKMX

Tweeter




- Aramid fiber inverted dome tweeter with exclusive "M" profile
- 1" (25mm) VC diameter
- Aluminum housing

SPECIFICATIONS

Nominal power	20W	
Maximum power	120W	
Sensitivity (2,83V/1m)	93dB	
Cone	Kevlar sandwich	
Nom. impedance	4Ω	
Surround	Butyl	
DC resistance	3.5Ω	
VC diameter	25mm	1"
Former	Kapton	
Layers	2	
Wire	Alu	
Net weight	95g	0.20lbs


FREQUENCY RESPONSE/IMPEDANCE

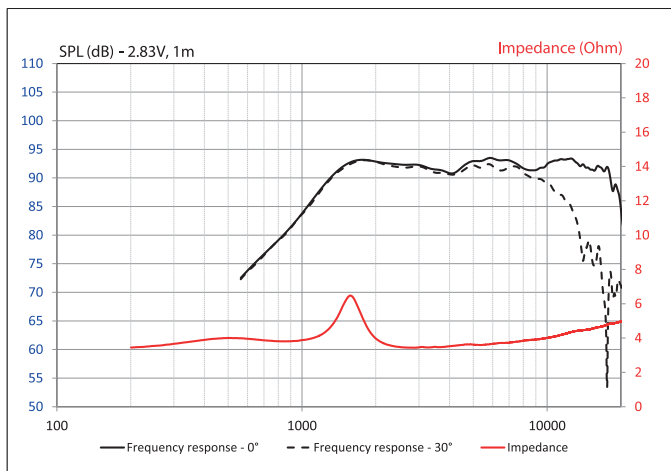

PARAMETERS

Rdc	3.5 Ω
Fs	1500Hz

MECHANICAL DRAWING

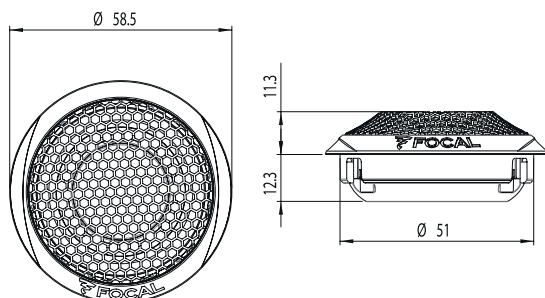

Elite
"HAUTE COUTURE" SOUND



FOCAL[®]
THE SPIRIT OF SOUND