


# EXPERT P25FS 10" (250mm) SUBWOOFER



- FLAX® Cone
- Low depth (3,4" / 87,6mm)
- Sealed enclosure
- Compact volume

## FREQUENCY RESPONSE / IMPEDANCE

Sealed enclosure

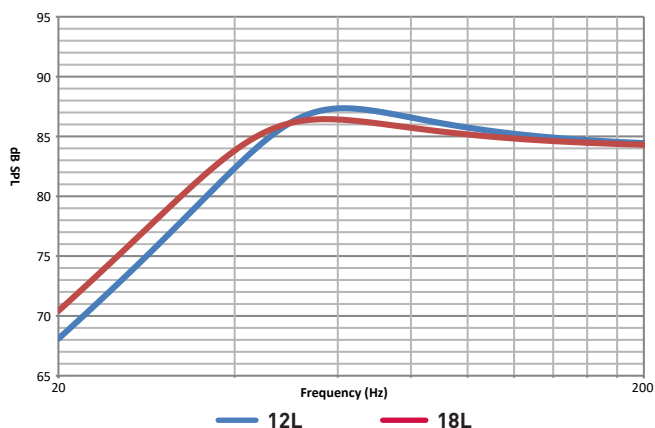


## SPECIFICATIONS

Nominal power	280W RMS	
Maximum power	560W	
Sensitivity (2.83V/1m)	87dB	
Cone	Flax	
Surround	Rubber	
Nom. impedance	4 Ohms	
DC resistance	3.2 Ohms	
VC diameter	38mm	1.5"
Former	Glass fiber	
Layers	4	
Wire	Copper	
Net weight	3500g	7.7lbs
Driver Displacement	2l	0,07cu.ft.

## PARAMETERS

Rdc	3.2 Ohms
Fs	30Hz
Mms	190g
Cms	0.15mm/N
Vas	25l
Qts	0.78
Qes	0.95
Qms	4.5
Bxl	11.2N/A
Sd	346cm <sup>2</sup>
SPL	84dB
Xmax	11mm

## MECHANICAL DRAWING

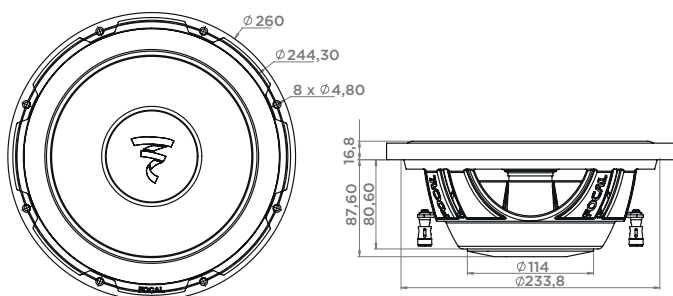

## SUGGESTED APPLICATION

Sealed enclosure

Volume	F-3(Hz)
12L 0,42 cu.ft.	37,5Hz
18L 0,64 cu.ft.	34Hz

**Performance**  
CREATE YOUR SOUND

**FOCAL**®