

# TWU1.5

## Technical Sheet

### Tweeter




- Al/Mg inverted dome, clean and extended high frequencies
- Poron® suspension, low Fs and power handling
- "Acoustic transparent" protection grille
- 4 different mounting possibilities:
  - Flush mounting
  - Surface mounting
  - Factory location
  - Oriented support

### SPECIFICATIONS

Nominal power	15W RMS	
Maximum power	100W	
Sensitivity (2,83V/1m)	94dB	
Frequency response	4kHz-21kHz	
Surround type	Poron®	
Nom. impedance	4Ω	
VC diameter	20mm	0.8"
Net weight	40g	0.09lbs
Dome	Al/Mg	


### FREQUENCY RESPONSE/IMPEDANCE

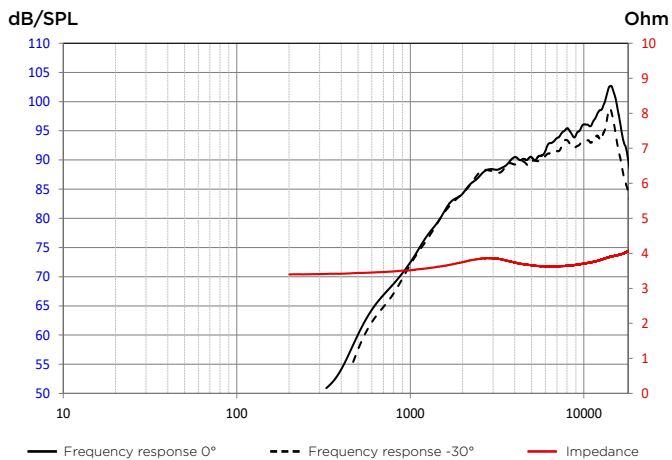

### PARAMETERS

Fs	2.6kHz
Re	3.4Ω

### MECHANICAL DRAWING

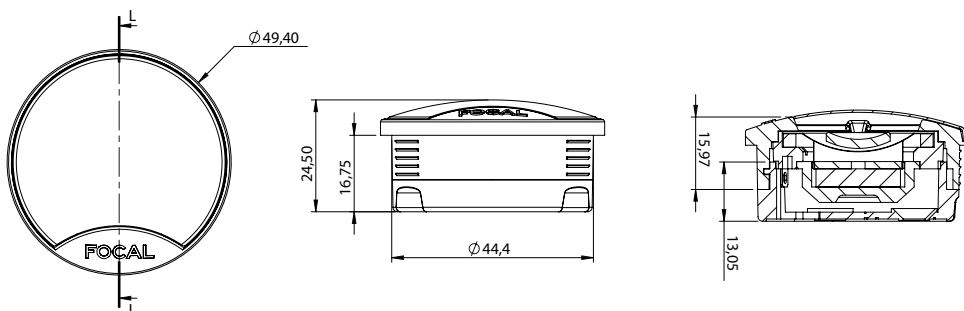

**FOCAL® INSIDE**

Focal® is a trademark of Focal-JMLab® - [www.focal.com](http://www.focal.com) - SCAA190920/1

**FOCAL®**  
LISTEN BEYOND